



CODE (A)	01	02	03	04	05	06	07	08	09	10	12
CODE (B)	4	6.6	9.18	11.7	14.3	16.8	19.3	22.0	24.6	27.0	32.1
CODE (C)	—	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	27.97



REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
版本	修改	日期	制圖	審核	核准
1					

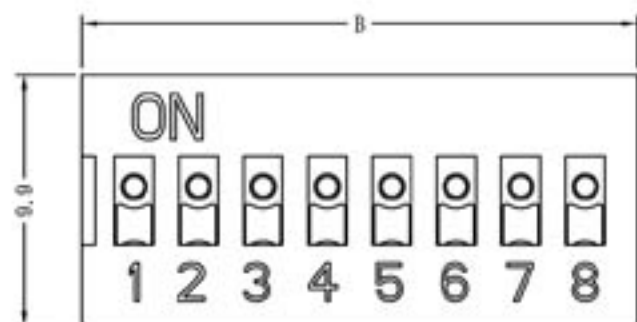



P.C.B. MOUNTING PATTERN

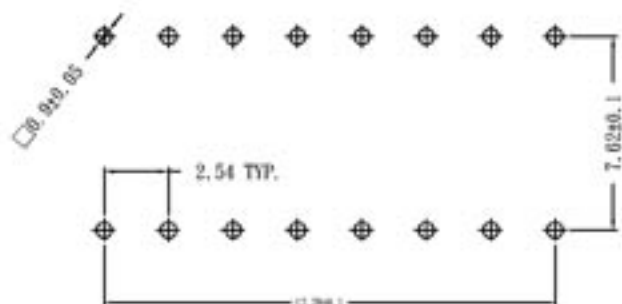

MOUNTING SURFACE

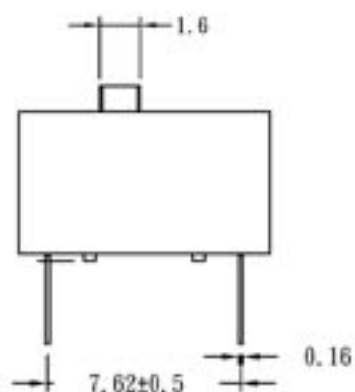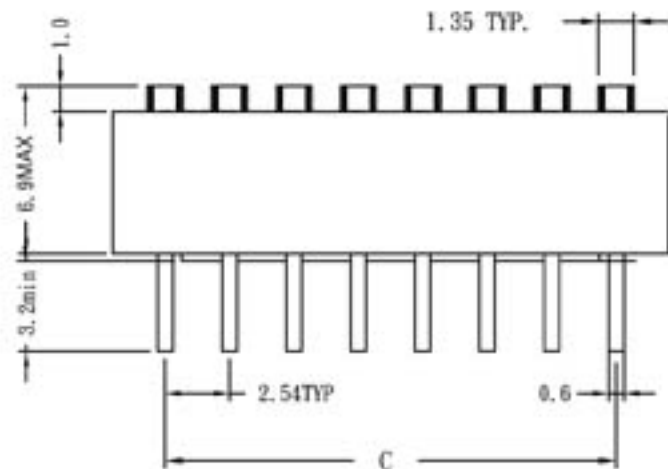

CIRCUIT DIAGRAM

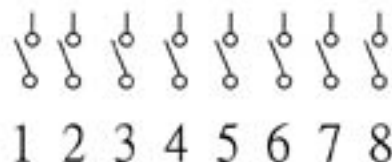

1. Electrical Life: 2000 Operations Min.
2. Non-Switching Rating: 100mA, 50VDC.
3. Switching Rating: 25mA, 24VDC.
4. Contact Resistance: 100 mΩ Max.
5. Insulation Resistance: 100MΩ Min.

長弓鼎有限公司
GREAT TRIPOD CO., LTD

NAME. 名稱	指撥開關
DWG NO. 料號	DSS-□□0-RR
MATERIAL 材質	

QUANTITY 數量	
H R C 硬度	
SCALE 比例	
UNIT 單位	MM

SIZE 紙張	A4
SHEET 頁數	1/1
REV 版本	A/0
DATE 日期	2010/03/17

ESGD 繪圖	
PROJ 設計	
CHKD 審核	
APPD 核准	

DIM TOL	Ang Tol
X ±0.30	X.XX ±0.10
X.X ±0.20	X.XXX ±0.05

成品圖	
-----	--